


PANZERI

MARK

24V DC

X01701.030.0410

Lighting fixture for ceiling or wall built-in installation for interiors, with direct light emission. Built-in structure in plasterboard, in aluminium in white polyacrylic paint. Reflector in aluminium in white polyacrylic paint. Pickled sheet metal closing frame in white, black, bronze, matt brass or titanium polyacrylic paint. Stainless steel spring clips for plasterboard fixing. Built-in hole dimension: 285x70mm (11,2x2,8")

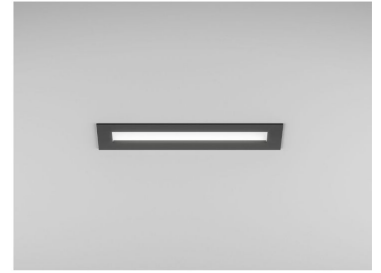

Data sheet


CODE	X01701.030.0410
SYSTEM POWER CONSUMPTION	8,5W
EFFICACY	45.25lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	L80 (B20) 80.000h
COLOUR TEMPERATURE	3000K Ra>90
LIGHT DISTRIBUTION	Diffused
POWER SUPPLY	24V DC
FREQUENCY	
ELECTRICAL CONFIGURATION	
DRIVER	Remote Not Included
NOMINAL LUMINOUS FLUX	1076lm
LUMEN OUTPUT	362lm
EFFICIENCY	33.643%
WEIGHT	0,5900Kg
PROTECTION DEGREE	IP20
COLOUR TOLLERANCES	SDCM 3
PACKING DIMENSIONS (CM)	0 x 0 x 0

Finish

White



Technical drawing

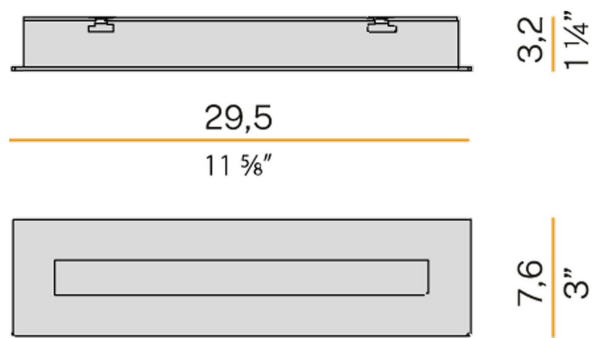

Accessories / source - power supply

XM100/24DIM

XM120/24E

LED driver, 120W 24V DC.




XM180/24E

LED driver, 180W 24V DC.



XM30/24E


LED driver, 30W 24V DC.

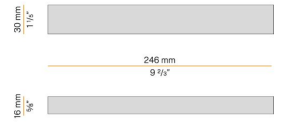

XM35/24DIM

XM6-20 UNI

LED driver, 4÷20W 250÷700mA.

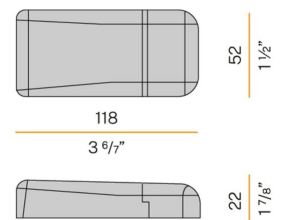

XM60/24E

LED driver, 60W 24V DC.

